




Let's help you
get your
PTLevel installed!

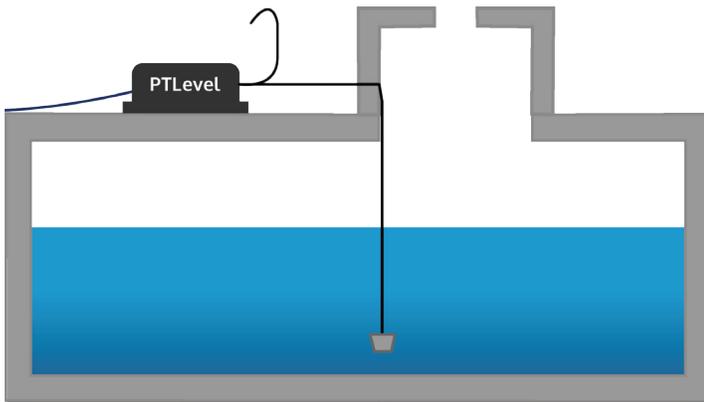

1 Run an ethernet cable

This cable can be purchased from any computer store or you can purchase from us at any length that you need with ends on it.




This cable takes care of power to the device and communication with your router.

The basic idea of running a cable is to mount the PTLevel somewhere convenient and out of the water, on top of the lid, outside of the manway, or on a wall, etc.. Then measure and run the ethernet cable any way possible to your internet router or to a wifi extender (which we supply).

Some Tips:

- Run the cable a couple of inches underground by using a flat shovel to create a wedge in the dirt.
- Use a conduit across a driveway or flowerbed.
- Use a piece of conduit to prevent a weed eater from breaking any wire coming up from the ground.
- Use the edge of siding to simply tuck in the wire.
- Run the cable to a close by outlet that is covered and use the wifi extender we supply.
- Keep it simple and go around difficult objects.
- Go online to ptlevel.com to see some installation pictures.

IMPORTANT: Put dielectric silicon in the ethernet ends before inserting the wire if you are putting the ends on yourself.

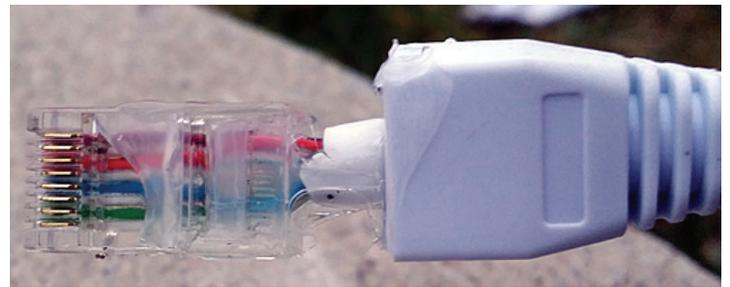

2 Mount your PTLevel

Mount the PTLevel device somewhere accessible like on top of the lid, on the side of the manway, on a wall, etc.. You can use the holes on the black box to use a fastener or you can glue the black box to a surface.




Try to make sure that the black box is out of any area where it is possible to be submersed. The box is weather proof but needs to breath through the small circle patch on the side for better level readings.

3 Connect power and comms


Use the pwr supply and injector and connect to your router. The injector must be on the router end. Please see the image on the other side.

Please turn over for more instructions

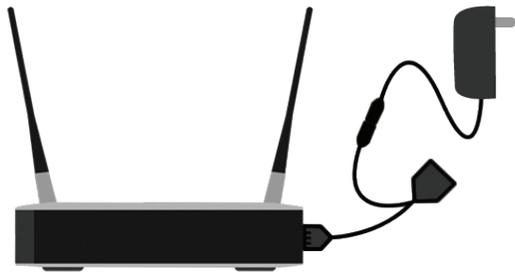


4 Install the pressure chamber

Assembly Process

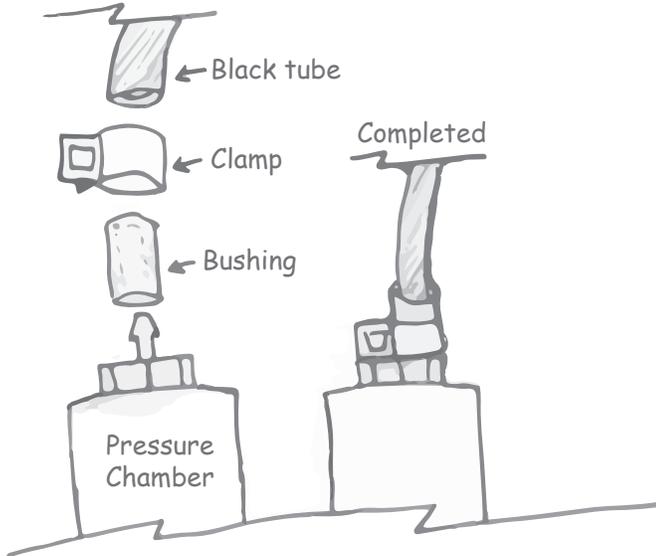


As indicated below, the black tube and pressure chamber above get dropped into the liquid to the bottom. You can cut the black tube to a length to prevent the chamber from tipping over.

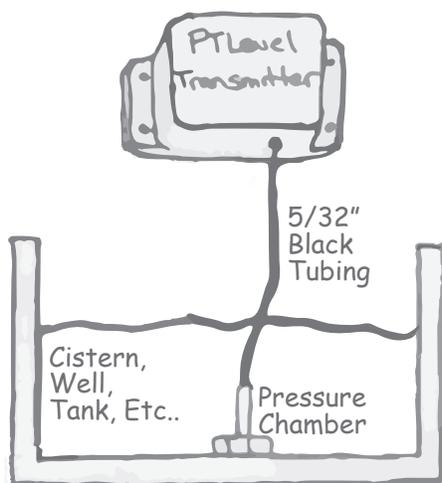


5 Link your online account

Create an account online at www.ptdevices.com.

Click on 'connect it' from the dashboard and put the ID into the next form.

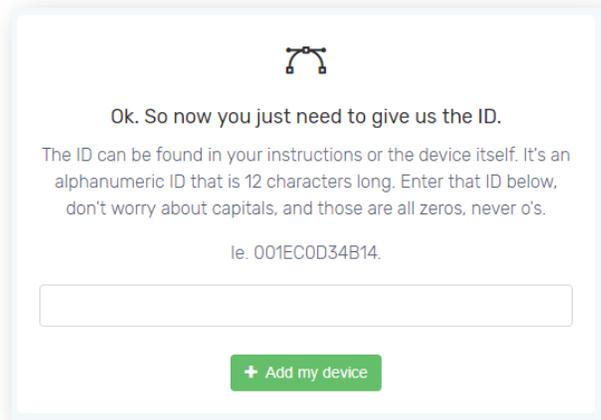

After you entered the ID, wait for your device to connect, and if it does, you will see a level reading. Finally, setup your device by clicking on the 'Please Setup' button, and entering in the full depth of the tank you are measuring.

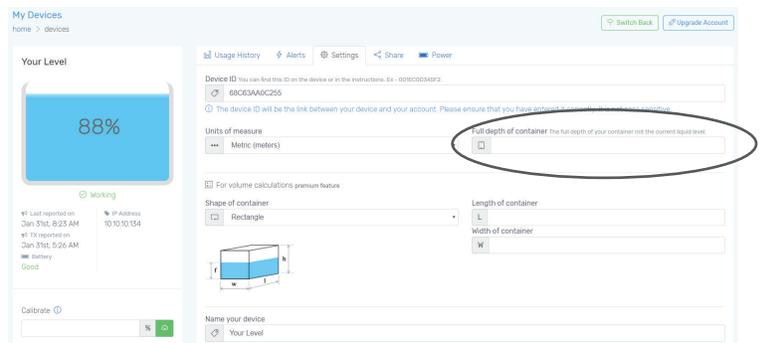

Finally, you can calibrate the device by simply measuring your actual level and entering the percentage in the calibration input.

Enjoy the PTLevel and be sure to play with the features like history, and entering in your address to enable sharing with your local water delivery company.

Quick Troubleshooting

- Ensure your ethernet cable is working by using a tester or connecting it to a laptop to see if there is internet.
- Check if the two LED lights are on and blinking on the black box underneath the ethernet connection.
- Be sure that the power injector is on the router end.
- Double check that your ID was entered correctly. You can see it by clicking on the info icon at the top left of the PTLevel box.

Don't hesitate to contact us if you are having trouble installing your device.

info@paremtech.com, 1-888-577-3335, or through the feedback section in your account.